


Moteur [kW]	Type	Entrée IEC	Vitesse de sortie [rpm] min ÷ max	Couple de sortie [Nm] min ÷ max	Poids MVS [kg]	Poids FVS [kg]
0.18	MVS063	63 B5	170 ÷ 880	3 ÷ 1.5	7.7	3.4
0.25				3 ÷ 2	9.2	3.4
0.37	MVS071	71 B5	190 ÷ 1000	6 ÷ 3	10.9	4.7
0.55				6 ÷ 4.5	13.2	4.7
0.75	MVS080	80 B5	190 ÷ 1000	12 ÷ 6	17.6	7.8
1.1	MVS090	90 B5	190 ÷ 1000	18 ÷ 9	43	31
1.5				24 ÷ 12	44.5	31
2.2	MVS100	100 B5	190 ÷ 1000	36 ÷ 18	74	55
3.0				48 ÷ 24	76	55
4.0	MVS112	100 B5	190 ÷ 1000	64 ÷ 32	84	57



Dimensions globales

VS - VARIATEURS

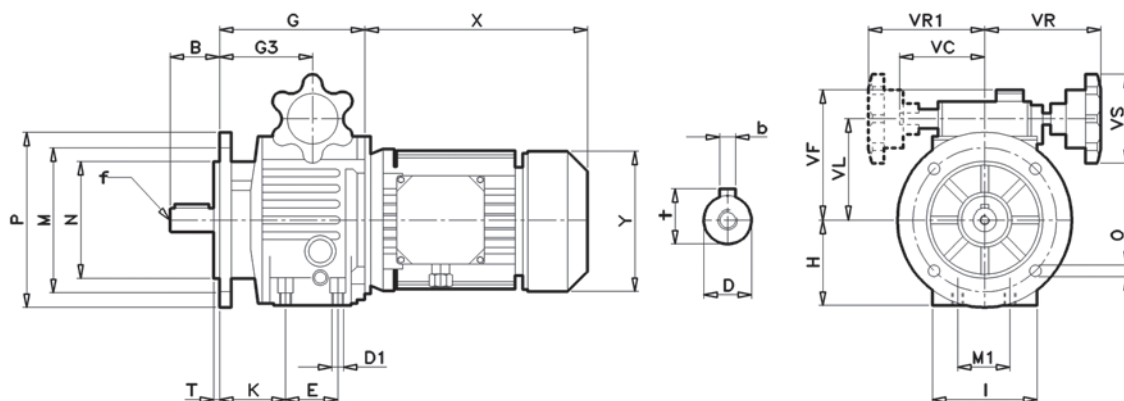

VS	063	071	080	090	100	112
B	23	30	40	50	60	60
D (h7)	11	14	19	24	28	28
D ₁	M6	M8	M8	---	---	---
E	50	40	58	---	---	---
G	111.5	108	143.5	174	222	222
G ₃	64	71.5	87.5	106.5	131	131
H	70	80	100	111	136	136
I	72	90	98	230	265	265
K	46	51.5	62	---	---	---
M	115	130	165	165	215	215
M ₁	60	77	84	---	---	---
N	95	110	130	130	180	180
O	9	9	11	11	15	15
P	140	160	200	200	250	250
T	3.5	3.5	3.5	3.5	4	4
VC	75	75	82.5	108.5	131	131
VF	113	125	142	148	181	181
VL	78	91	107	127	158	158
VR	113	113	120	140	150	150
VR ₁	113	113	120	140	150	150
VS	70	70	85	85	120	120
b	4	5	6	8	8	8
f	M5	M6	M6	M8	M10	M10
t	12.5	16	21.5	27	33	33

Dimensions X et Y selon la marque du moteur
Dimensions et poids non contractuels

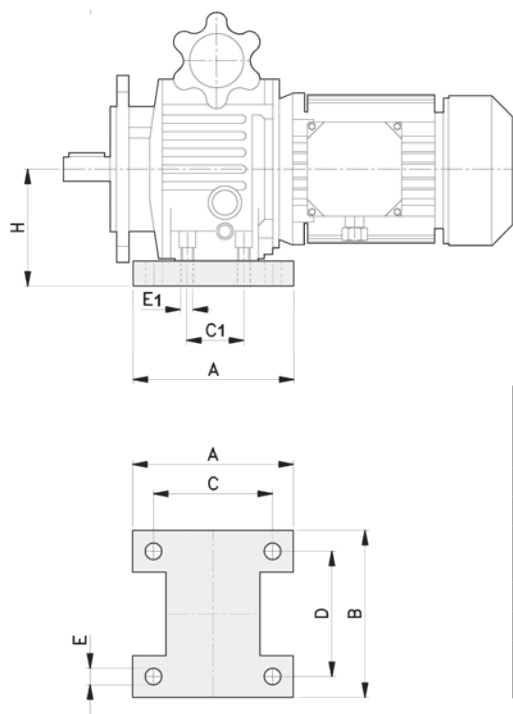

VS	063	071	080
A	120	125	150
B	145	149	190
C	105	104	125
C1	50	40	58
D	110	120	160
D1	60	77	84
E	9	9	11
E1 (4x)	M6	M8	M8
H	80	93	113

